


TECHNICAL DATA SHEET

DOVER 5x5 ANTI-SLIP (30,6x30,6)

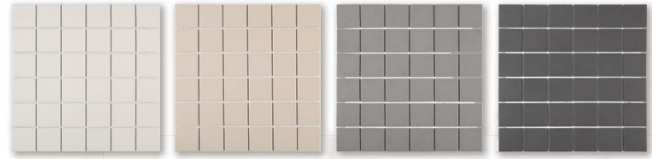

WHITE

BEIGE

GREY

BLACK



DESCRIPTION

PORCELAIN CERAMIC TILE MOSAIC WITH MATT FINISH ANTI-SLIP.

CHARACTERISTICS

TPOLOGY FULL BODY AND MONOCOLOR ON SURFACE
SIZE: 306mm x 306 mm x 6 mm- **CHIP SIZE:** 50 mm x 50 mm
IT HAS VIRTUALLY A ZERO POROSITY SURFACE, HAS A HIGH RESISTANCE TO ADVERSE WEATHER FACTORS, ESPECIALLY TO FROST. ALL THIS FORMING A MASS OF SOLID AND COMPACT CLAY DOUGH MATERIAL FIRED AT A TEMPERATURE OF 1250 DEGREES CELSIUS.

SPECIFICATIONS

NORM	DESCRIPTION	MINIMUM REQUIRED	SPECIFICATIONS INTERMATEX
ISO 10545-2	Length and width	max. 0.6%	< 0.1%
ISO 10545-2	Flatness of surface	max. 0.5%	< 0.2%
ISO 10545-3	Water absorption	max. 0.5%	< 0.1%
ISO 10545-6	Deep Abrasion	max. 175 mm ³	< 115 mm ³
EN-101:1991	Scrach hardness according to Mohs	Not Demanded	MOHS 4
NORM	DESCRIPTION	CLASIFICATION	
DIN-51130	Slip resistance. Ramp Method. (Boot +Oil)	R11	
DIN-51097	Slip resistance. Ramp Method. (Bare feet +soapy water)	Class C	

APPLICATIONS

THIS TYPE OF MOSAIC CAN BE USED LIKE FLOOR AND WALLS.

INSTALLATION

INSTALLATION IS MADE WITH FLEXIBLE ADHESIVES, CONTAINING SYNTHETIC ADDITIVES FOR NON-ABSORBENT MATERIAL. ADHESIVE APPLIED WITH PROPER SQUARED NOTCH TROWEL (3-4 mm) AND ISOLATED IMMEDIATELY. WITH THIS AN INSTALLATION WITHOUT AIR BUBBLE-FREE IS ACHIEVED ONCE THE MOSAIC SHEET IS LAID DOWN USE A RUBBER TROWEL OR GROUT FLOAT TO PRESS TO FULLY GUARANTEE THE ADHESION.

CLEANING

CLEAN AND SOFT CLOTHE AND HOME SOAP, NEUTRAL

RECOMENDATIONS

ALWAYS USE PROTECTIVE GLOVES AND ANTI-CRUSHING FOOTWEAR, PREFERABLY STEEL TOE BOOTS.

STORAGE

PRODUCT SHOULD BE STORED IN A FLAT SURFACE AND IN A SHELTERED AREA AWAY FROM THE RAIN.

PACKAGING

Pcs/Box	Box/Pallet	Kg/Pallet	m2 / Pallet
10	108	1.175,0	97,20